




REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
2	Added applicable Australian Standards	2014-12-02	JUSTIN

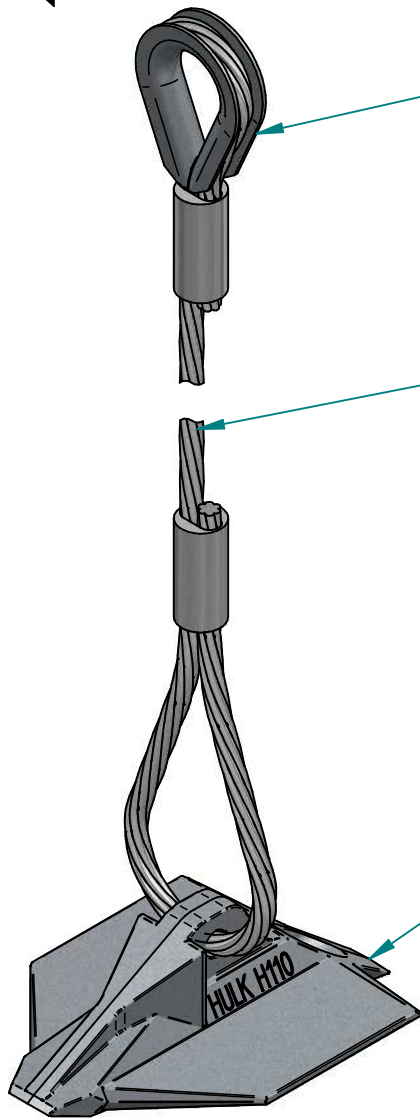

Thimble Eye

8mm ϕ X 1.2m Wire Rope:
Galvanised with Aluminium Ferrules or
Stainless Steel with Copper Ferrules

Hulk Earth Anchor Head:
Hulk H50
Hulk H80
Hulk H110

Applicable Australian Standards:
AS1831, AS4680, AS1666, AS2076

Assembly Minimum Breaking Load Galvanised – 45kN
Assembly Minimum Breaking Load Stainless Steel – 38kN
Holding capacity is soil dependant

Hulk "H" Thimble Eye Wire Rope Anchor Options

Order Code	Description	Quantity per case	Weight per case
H50	Hulk H50 c/w galvanised wire rope tendon	15	18 kg
H80	Hulk H80 c/w galvanised wire rope tendon	12	15 kg
H110	Hulk H110 c/w galvanised wire rope tendon	10	14 kg
H50SS	Hulk H50 c/w stainless steel wire rope tendon	15	18 kg
H80SS	Hulk H80 c/w stainless steel wire rope tendon	12	15 kg
H110SS	Hulk H110 c/w stainless steel wire rope tendon	10	14 kg

TITLE Hulk H Wire Rope	REV 2	SCALE 1:2.5		NAME JUSTIN	DATE: 2014-09-15	DISTRIBUTED BY:
DRAWING NUMBER HLK-H	WEIGHT N/A	SIZE A4	DRAWN	ROBERT	2014-09-15	
Unless otherwise specified: All dimensions are in millimeters, Tolerance ± 0.2 mm, $\pm 0.5^\circ$		Sheet 1 of 1	CHECKED	JUSTIN	2014-09-15	
			APPROVED	HLK-H - Wire Rope with Thimble Eye - Rev2.dft		